


# F1126P-24-410W

24FE+2GE/1SFP Unmanaged Switch With 24-Port PoE

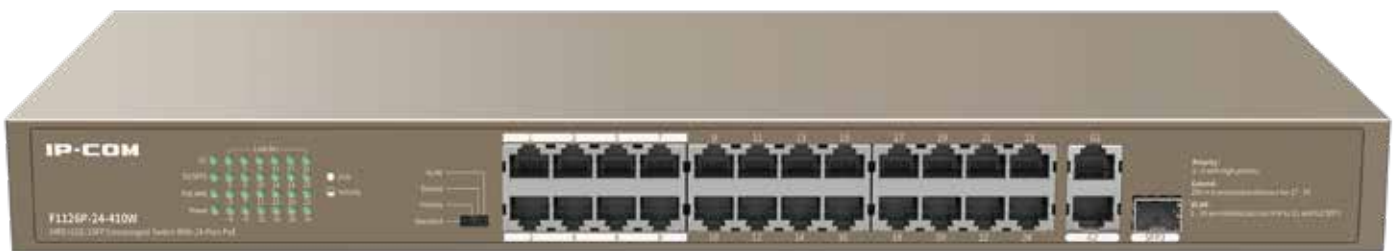

# F1126P-24-410W

## 24FE+2GE/1SFP Unmanaged Switch With 24-Port PoE

---

### Descriptions

F1126P-24-410W is a unmanaged PoE switch independently designed by IP-COM. Compliant with IEEE 802.3af and IEEE 802.3at standards, it can identify PoE-powered devices intelligently. With a maximum PoE power output of 370 W, and 30 W for a single port, it can supply power when transmitting data with APs, IP cameras, and IP phones. The switch supports 4 working modes, including standard, priority, extend and VLAN modes, is an ideal choice for SMBs, hotels, schools, factories with video surveillance and wireless networking requirements.

## Features

- \* Compliant with IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3z, IEEE802.3x and IEEE802.3af/at standards.
- \* 24 \* 10/100 Mbps Base-TX RJ45 ports for data transmission and power supply, 2 \* 10/100/1000 Mbps Base-T RJ45 ports for data transmission, 1 \* 1000 Mbps Base-X combo SFP slot
- \* 16 K MAC address table and MAC address auto-learning.
- \* IEEE 802.3x-compliant full-duplex flow control and half-duplex backpressure flow control.
- \* 8.8 Gbps backplane bandwidth.
- \* Maximum power consumption of a single port: 30W; Maximum power consumption of the switch: 410W.
- \* 4 Mb cache size for smooth video surveillance.
- \* 4 modes: standard, priority, extend and VLAN.
- \* Rack mounting.

## USPs



### 6 kV lightning protection

The switch offers various safety and protection types, including 6 kV lightning protection, PSE short-circuit protection, PoE overload protection, surge current protection etc.




### Gigabit uplink port

With one 1000 Mbps combo SFP slot, the switch can meet the current demand for uplink bandwidth of Gigabit WLAN and HD digital surveillance.



### 370 W PoE power supply



The switch features 24 IEEE 802.3at/af-compliant RJ45 ports. The entire switch offers a maximum PoE power output of 370 W, and 30 W for a single port, to supply power to and data transmission with 24 PoE-powered devices such as APs and IP cameras.



### One-key to switch 4 modes

It supports 4 working modes, including standard, priority, extend and VLAN modes. The hardware DIP mode switch makes networking straightforward and effortless.

# Appliation

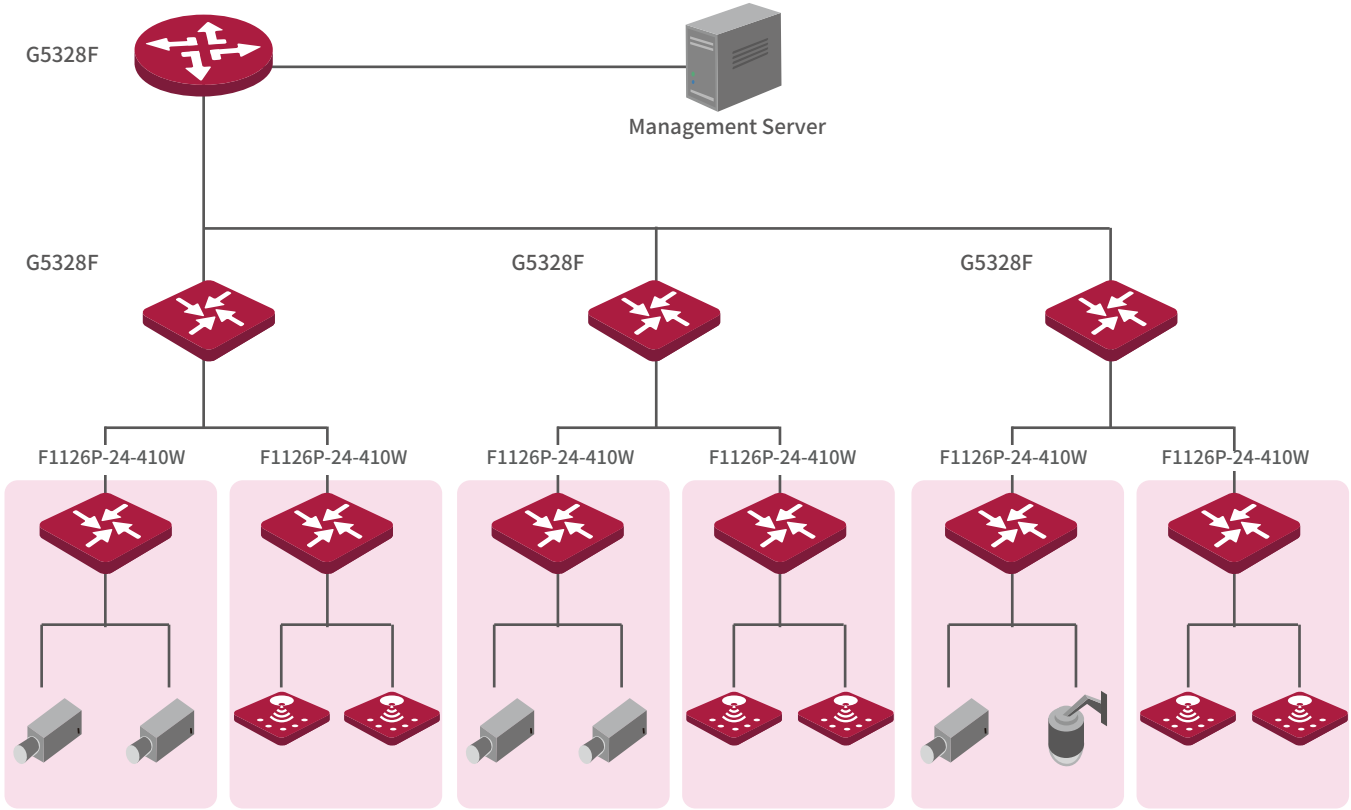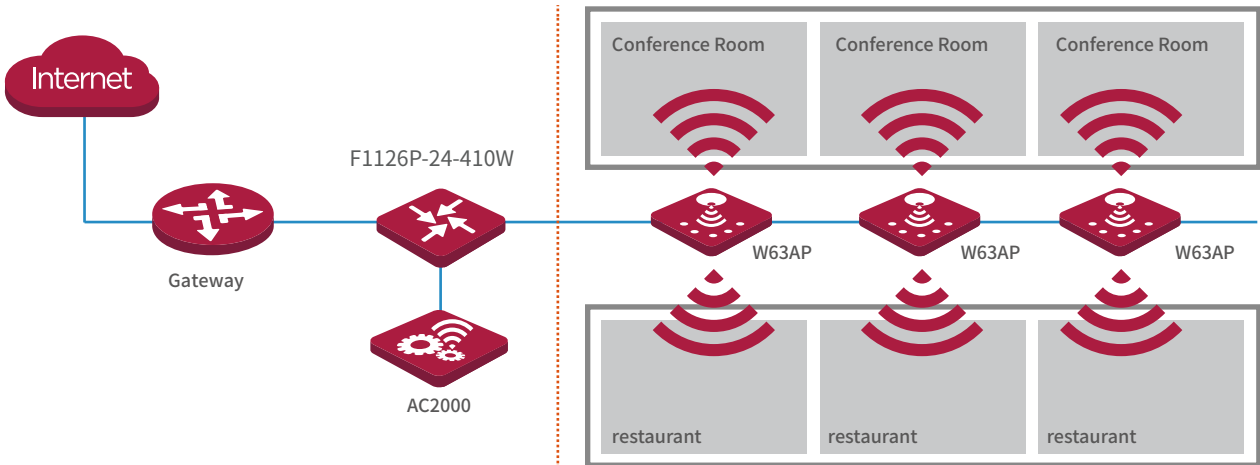

# Specifications

Specifications	
Standards	IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3z, IEEE802.3x, IEEE802.3af/at
LEDs indicator	24 * Link/Act LEDs 1 * G1 LED 1 * G2/SFP2 LED 1 * PoE-MAX LED 1 * Power LED
LEDs indicator	24 * 10/100 Mbps Base-TX RJ45 ports (Data/Power) 2 * 10/100/1000 Mbps Base-T RJ45 ports (Data) 1 * 1000 Mbps Base-X SFP port (Combo)
Forwarding Rates	6.55 Mpps
Switching capacity	8.8 Gbps
MAC Address Table	16K
Lightning protection	≥6KV
Input voltage	AC: 100-240V~50/60Hz
PoE supply	Ports 1-24 support standard IEEE802.3af/at 30W output per PoE port 370W output of the total PoE Power
Power consumption	410W output the whole device
Dimensions	440*284*44mm
Four Modes	Standard: Default mode of the switch. In this mode, it works as an unmanaged switch; all ports can communicate with each other separately. Priority: In this mode, port G1 and G2/SFP2 serve as uplink ports, ports 1 – 8 serve as high priority port. All ports can communicate with each other separately. Extend: In this mode, data rate of ports 17 - 24 reduces to 10 Mbps, the maximum transmission distance can be 250 meters, and all ports can communicate with each other. VLAN: In this mode, ports 1 - 24 of the switch can communicate with port G1, G2/SFP2 separately, but cannot communicate with each other. You can enable this mode to reduce broadcast storm and isolate DHCP broadcast.
Environment	Operating Temperature: 0°C~45°C (32°F~113°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Certifications	CCC、FCC、CE、RoHS



## Headquarters

IP-COM Networks Co.,Ltd.

Tel: +86 755-27653089

Fax: +86 755-27657178

Email: [marketing@ip-com.com.cn](mailto:marketing@ip-com.com.cn)

Website: [www.ip-com.com.cn](http://www.ip-com.com.cn)

ADD: Tower E3, No1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China.

Copyright©2016 IP-COM Networks Co., Ltd. All rights reserved.

